

Atos ARM solutions for HPC

Eric Eppe

Head of Solution Marketing & Portfolio
HPC & Quantum Global Business Line




Tuesday, March 7th, HPC User Forum, TERATEC

Trusted partner for your Digital Journey

Bull
atos technologies

Atos HPC and ARM

A long time engagement

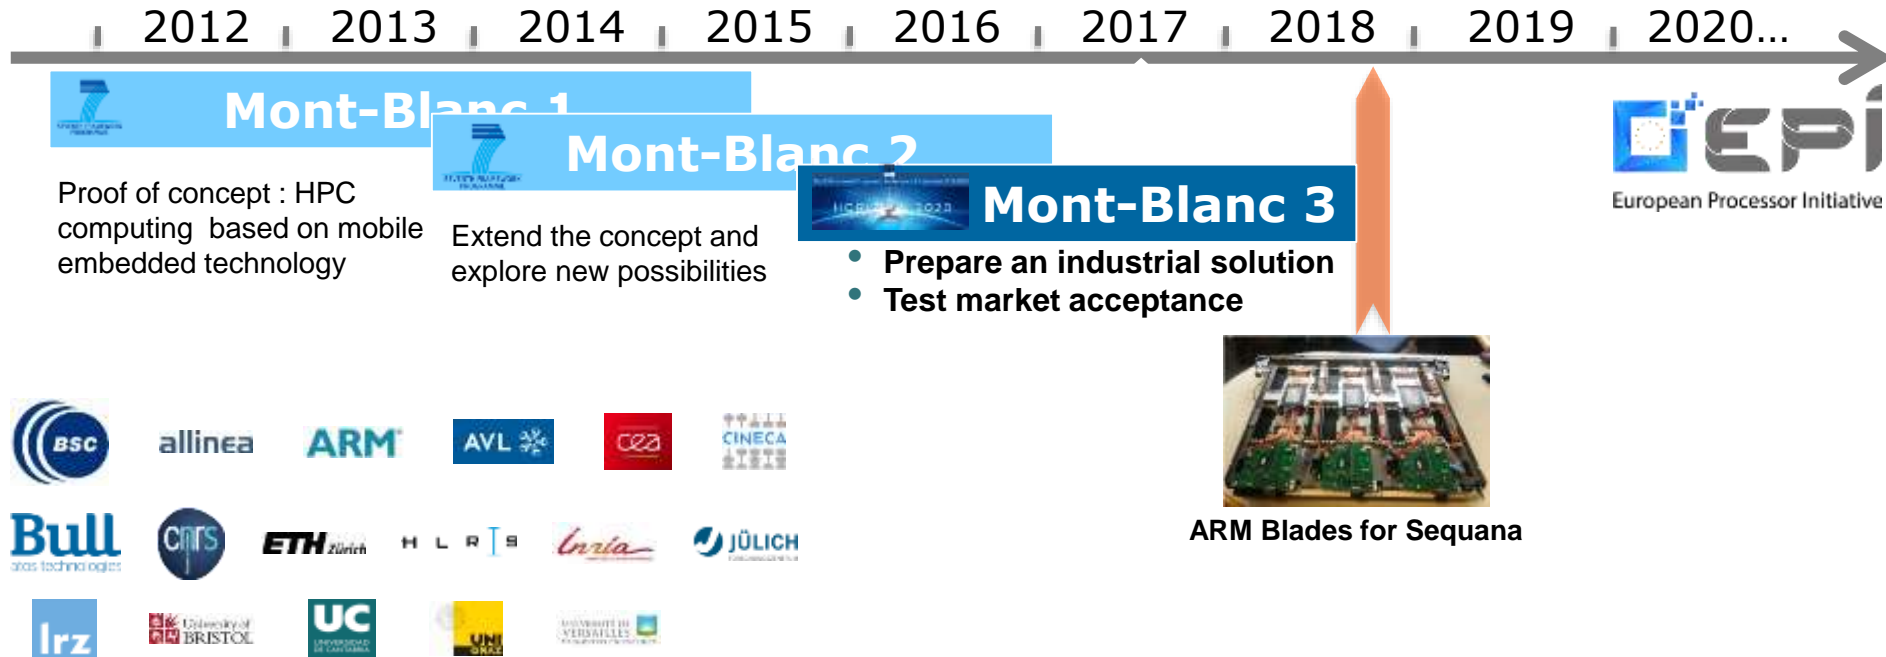


Current processors technology snapshot

Different suitespots for different workloads

	Intel®	AMD®	ARM®
Model considered	Gold Skylake	Epyc Naples	Marvell ThX2
Processing elements	Up to 28 cores	Up to 32 cores	
Frequency	2.0 – 2.7 GHz		
Max ISA supported	AVX-512	AVX2	Neon
DP FLOP/cycle	2 FMA @ 512-bits	(2 ADD + 2 MUL) @ 128-bits	2 FMA @ 128-bits
	32 FLOP/cycle	8 FLOP/cycle	
Core DP FLOP/s	64 GFLOP/s @ 2.0GHz	16 GFLOP/s @ 2.0GHz	
Socket DP FLOP/s	1,792 GFLOP/s @ 2.0GHz	512 GFLOP/s @ 2.0GHz	
Memory Interface	6 DDR4 channel @2667 MT/s	8 DDR4 channel @2667 MT/s	
Memory Bandwidth	128 GByte/s/socket	170 GByte/s/socket	
Bytes:FLOP (1/AI)	0.072	0.332	




CN99xx: 1st member of THUNDERX2 family

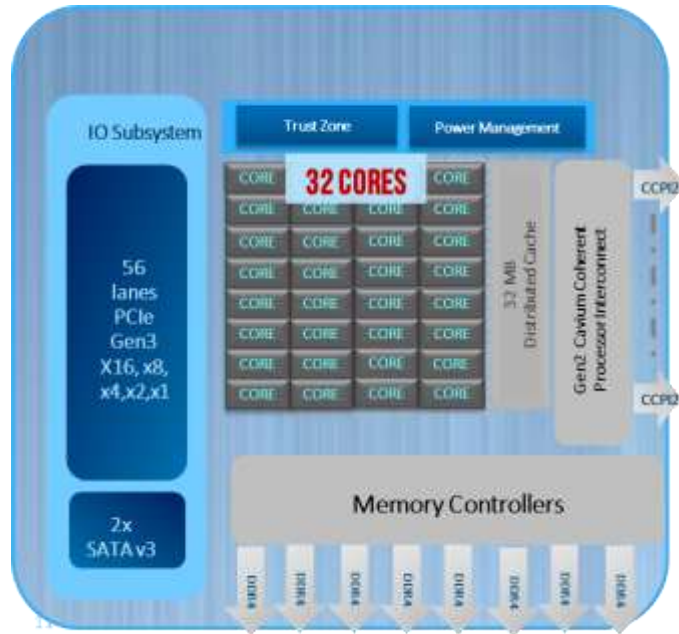

- ▶ Up to 32 custom ARMv8 cores, up to 2.5GHz
- ▶ Quad issue fully out of order, 4 threads per core
 - 32KB L1 I/D Cache; 256KB L2 per core
 - 32 MB distributed L3 cache (1MB per core)
 - 600 Gbps Gen 2 Coherent Processor Interconnect (CCPI2) (24 lanes @ 25Gbps)
 - 6 Tbps of on-die fabric for data (512 bits bidirectional running up to 3 GHz)
- ▶ Dual socket configuration support
- ▶ Up to 8 channels of DDR4, up to 2667MHz
- ▶ Up to 56 lanes of PCIe Gen3
- ▶ Integrated SATAv3, USB 3.0, GPIOs
- ▶ Server class virtualization
- ▶ Server class RAS
- ▶ Extensive Power Management
- ▶ Socketed LGA for most flexibility

Bull sequana compute blade: X1310

Marvell ThunderX2™ CN99xx – ARMv8 processor

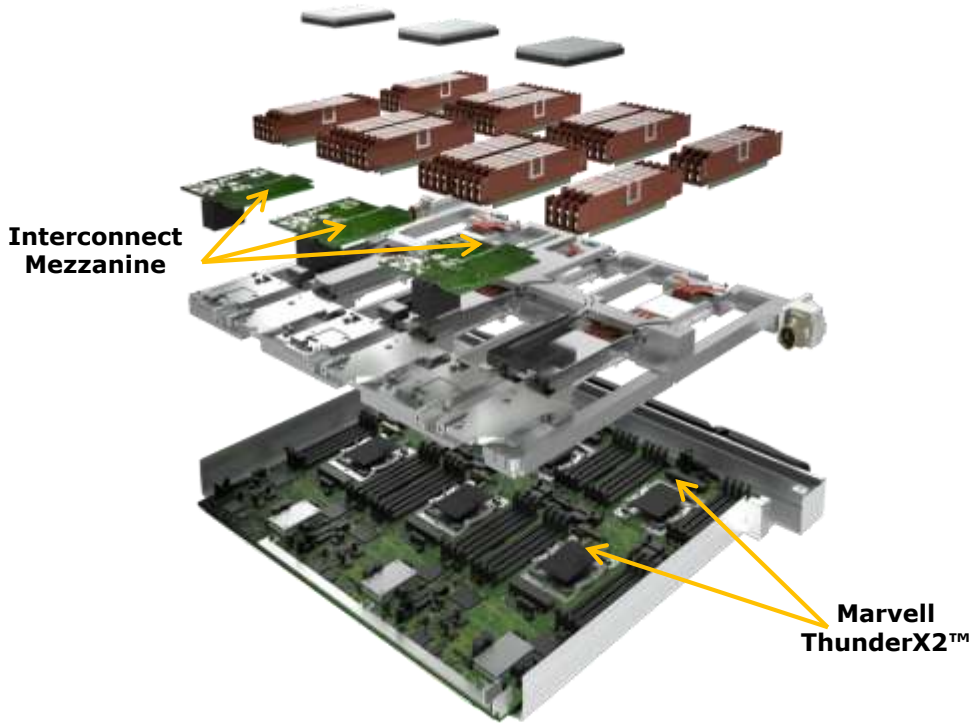

- ▶ **1U form factor**
- ▶ **Direct liquid cooling**
- ▶ **3 compute nodes per blade with:**
 - 2 Marvell ThunderX2 processors with
 - Up to 32 custom ARMv8 cores per CPU, 4 threads per core, up to 2.5GHz
 - 16 DDR4 @266MT/s DIMM slots up to 1TB RAM
 - 1 Interconnect mezzanine board (EDR/HDR)
 - disks
 - 1 x 2.5" 7 mm SATA SSD
 - Or 1x 2.5" PCIe flash SSD


Atos Sequana Solutions Roadmap & ARM



X1000



X1000 NG

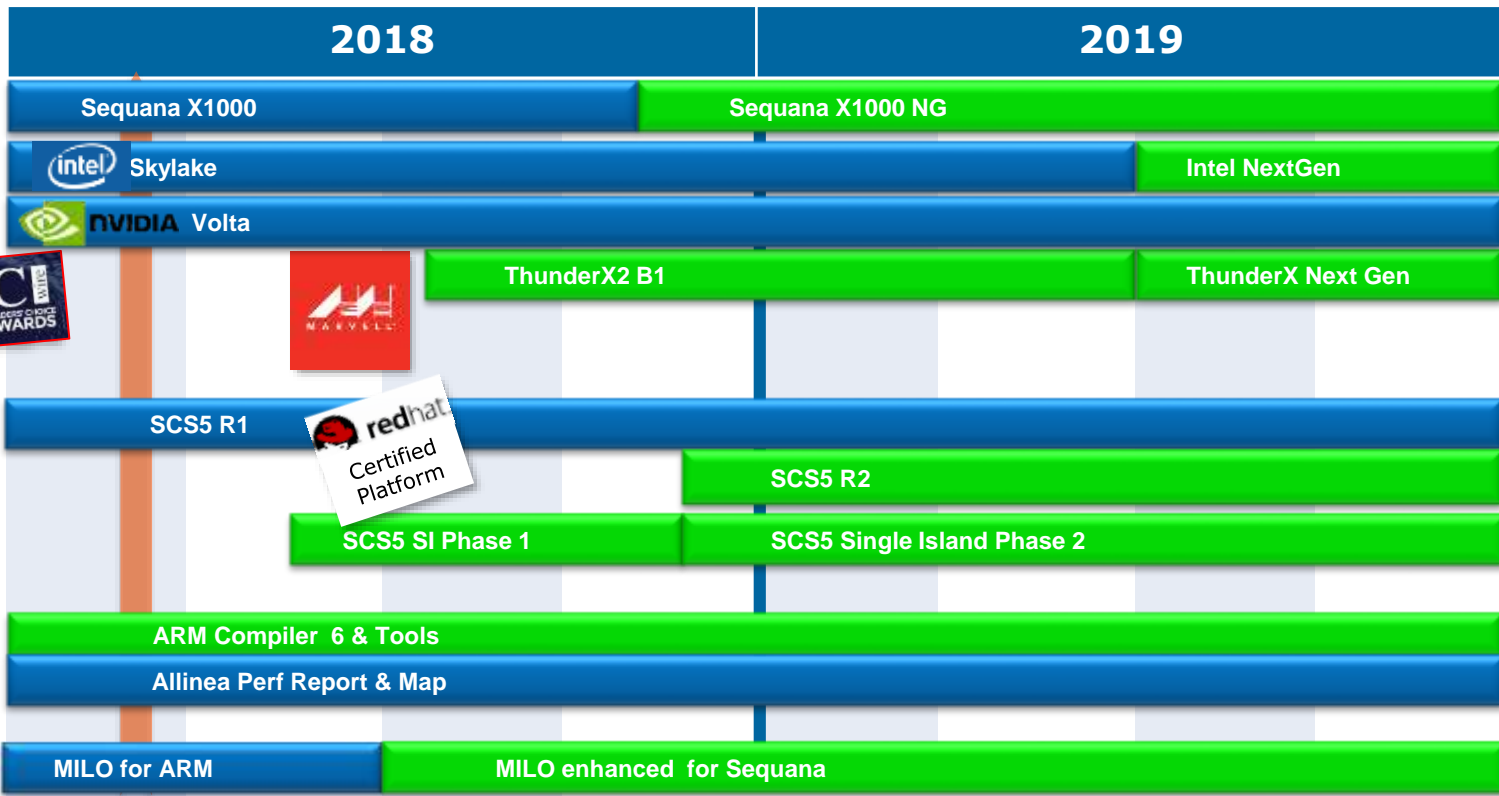

Software Platform



ARM incubator labs

Current

New



Integrate new usage models & new technologies

Matching emerging technologies and applications



ARM Incubator labs



Define a suitable & efficient **ARM ecosystem** for **key customers** workflows



Bring a clear **strategy** and directions to our **future developments**



Provide access to ARM resources and expertise



A full Solution to kickstart HPC projects on ARM

Be Efficient with Atos full spectrum solution

BullSequana X
Family



X1000 &
X1000 NG

First
Direct Liquid Cooled
ARM HPC solution




Enhanced support
and porting lab
expertise



ARM Incubator labs

ARM®



Atos

Thank you

Atos, the Atos logo, Atos Codex, Atos Consulting, Atos Worldgrid, Worldline, BlueKiwi, Bull, Canopy the Open Cloud Company, Unify, Yunano, Zero Email, Zero Email Certified and The Zero Email Company are registered trademarks of the Atos group. April 2017. © 2017 Atos. Confidential information owned by Atos, to be used by the recipient only. This document, or any part of it, may not be reproduced, copied, circulated and/or distributed nor quoted without prior written approval from Atos.

Bull
atos technologies